

ADDENDUM NO. 2
to
CITY OF NEGAUNEE
LACOMBE FIELD SIDEWALK IMPROVEMENTS
GEI PROJECT NO. 2004805

GEI CONSULTANTS OF MICHIGAN, P.C.
109 W. BARAGA AVE
MARQUETTE, MICHIGAN 49855

DATE: July 31, 2023

BID DATE: August 3, 2023 at 2:00 p.m. Local Time

TO ALL BIDDERS BIDDING ON THE ABOVE PROJECT:


All Bidders submitting a Bid on the above Contract shall carefully read this Addendum and give it consideration in the preparation of their Bid. Contractor shall list all addendums on the Bid Form to ensure conformity in the bid.

Drawings, Specifications and/or Proposals are herein amended, expanded and/or modified, as hereinafter described, and become a part of the Contract Documents with same force and affect as if incorporated, therein, originally. Any contrary provisions contained, or referred to, in Drawings and/or Specifications, shall remain applicable unless overridden by this Addendum. Revised or contrary provisions herein shall not affect any other part of Contract Documents and any deletions, additions, substitutions and/or revisions mentioned, shall include all labor, materials, methods, modifications, etc. required for complete performance of the work.

Question/Answer

- Questions 1.** *What is the length of the ADA rails and are there rails on each side of the ADA ram.*

Answer: Contractor bid to include 90 feet of rail, not including end extension and returns. This will allow for continuous rail from top to bottom of the ramps and landings on both sides. Contractor to include spindles with maximum of 4" along rail, see below diagram.

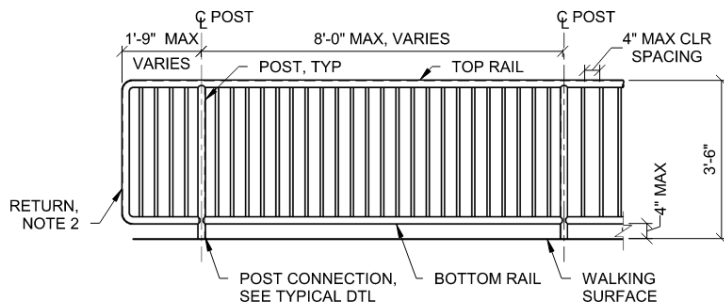

NOTES:

- MEMBER SIZES FOR TOP RAIL, BOTTOM RAIL AND POSTS ARE 1 1/2" STD PIPE OR ROUND HSS 1.900x0.145. MEMBER SIZES FOR SPINDLES ARE 1/2" STD PIPE MINIMUM. HANDRAIL SHALL BE 1 1/4" STD PIPE MINIMUM.
- RETURN TOP RAIL TO BOTTOM RAIL AT OPEN ENDS.
- SEE TYPICAL GUARDRAIL CORNER FOR CORNER DETAILS.

1 TYPICAL GUARDRAIL ELEVATION
 SCALE: 1/2" = 1'-0"

Bidder shall acknowledge receipt of this Addendum by inserting the date and the number in the spaces provided in the Bid Form.

GEI Consultants
Marquette, Michigan

A handwritten signature in black ink, appearing to read "G. M. Meister". The signature is written in a cursive, flowing style.

George M. Meister, P.E.
Project Manager